


## PH7 guide chain

### Energy chains

Plastic guide chains, highly stressable, economical, easy to mount, compatible connections, simple handling with standard tools, Ha -Outer height 52 mm, Hi  
 - Inner height 34 mm, T -Pitch 70 mm

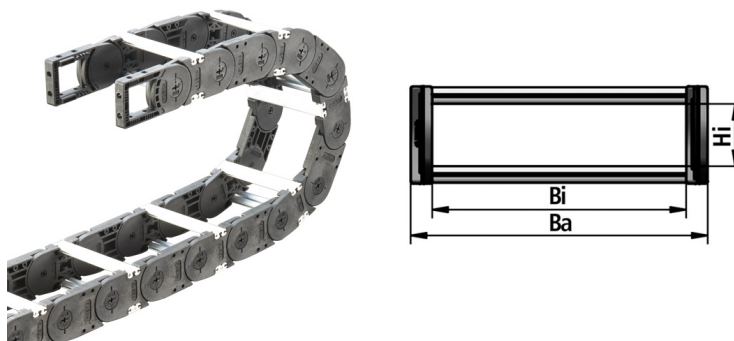

**Temperature:** -40°C ... +135°C

**Material:** link plates: PA6 GFK  
 plastics, frame bar:  
 aluminium

#### APPLICATIONS:

- Application: automation / [special-purpose] machines / plant construction / doors / elevators

#### CHARACTERISTICS:

- Properties: easy to mount
- economical
- designed for extended lifetime
- inner and outer widths up to approx. 600 mm available
- compatible connections
- simple handling with standard tools



FLEXA No.	Article	Bi [mm]	R [mm]	Ba [mm]	Bow length [mm]	Max. quant. separators	Weight [kg/m]	PU [m]
16097050007	PH7-50A-7F	50,0	75	76,0	300	3	1,670	1
16097050010	PH7-50A-10F	50,0	100	76,0	400	3	1,670	1
16097050015	PH7-50A-15F	50,0	150	76,0	600	3	1,670	1
16097050020	PH7-50A-20F	50,0	200	76,0	800	3	1,670	1
16097050030	PH7-50A-30F	50,0	300	76,0	1200	3	1,670	1
16097065007	PH7-65A-7F	65,0	75	91,0	300	4	1,720	1
16097065010	PH7-65A-10F	65,0	100	91,0	400	4	1,720	1
16097065015	PH7-65A-15F	65,0	150	91,0	600	4	1,720	1
16097065020	PH7-65A-20F	65,0	200	91,0	800	4	1,720	1
16097065030	PH7-65A-30F	65,0	300	91,0	1200	4	1,720	1
16097100007	PH7-100A-7F	100,0	75	126,0	300	7	1,850	1
16097100010	PH7-100A-10F	100,0	100	126,0	400	7	1,850	1
16097100015	PH7-100A-15F	100,0	150	126,0	600	7	1,850	1
16097100020	PH7-100A-20F	100,0	200	126,0	800	7	1,850	1
16097100030	PH7-100A-30F	100,0	300	126,0	1200	7	1,850	1
16097150007	PH7-150A-7F	150,0	75	176,0	300	10	2,030	1
16097150010	PH7-150A-10F	150,0	100	176,0	400	10	2,030	1
16097150015	PH7-150A-15F	150,0	150	176,0	600	10	2,030	1
16097150020	PH7-150A-20F	150,0	200	176,0	800	10	2,030	1
16097150030	PH7-150A-30F	150,0	300	176,0	1200	10	2,030	1
16097200007	PH7-200A-7F	200,0	75	226,0	300	14	2,200	1
16097200010	PH7-200A-10F	200,0	100	226,0	400	14	2,200	1



<b>FLEXA No.</b>	<b>Article</b>	<b>Bi [mm]</b>	<b>R [mm]</b>	<b>Ba [mm]</b>	<b>Bow length [mm]</b>	<b>Max. quant. separators</b>	<b>Weight [kg/m]</b>	<b>PU [m]</b>
16097200015	PH7-200A-15F	200,0	150	226,0	600	14	2,200	1
16097200020	PH7-200A-20F	200,0	200	226,0	800	14	2,200	1
16097200030	PH7-200A-30F	200,0	300	226,0	1200	4	2,200	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.