

DIN-Power coding pin



Image is for illustration purposes only. Please refer to product description.

Part number	09 04 000 9908
Specification	DIN-Power coding pin
HARTING eCatalogue	https://b2b.harting.com/09040009908

Identification

Category	Accessories
Series	DIN 41612
Type of accessory	Coding pin
Description of the accessory	for types D, E, F, FM, 2F, MH
Features	lead-free

Material properties

Material (accessories)	Thermoplastic
Colour (accessories)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

Specifications and approvals

Railway classification	F4/I3 acc. to NFF 16-101/102
------------------------	------------------------------

Commercial data

Packaging size	100
Net weight	0.038 g




Pushing Performance
Since 1945

Commercial data

Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140008182
eCl@ss	27440203 Coding for industrial connectors

Coding pin

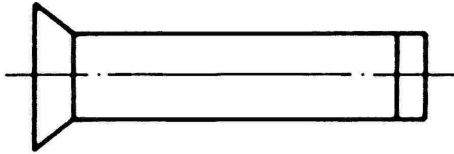

To avoid accidental and incorrect mating of adjacent connectors a coding system is required. The coding is achieved by means of a coding pin which is inserted into the selected chamber of the female connector (the contact cavity must be filled with a female contact!). The opposite male contact must be removed with the help of the specially designed tool. It's recommended to use a number of coding pins in relation to the total number of contacts per connector: 3 pins for 64 contacts, 7 pins for 160 contacts.