

## Han GND hood, 7,5-14mm

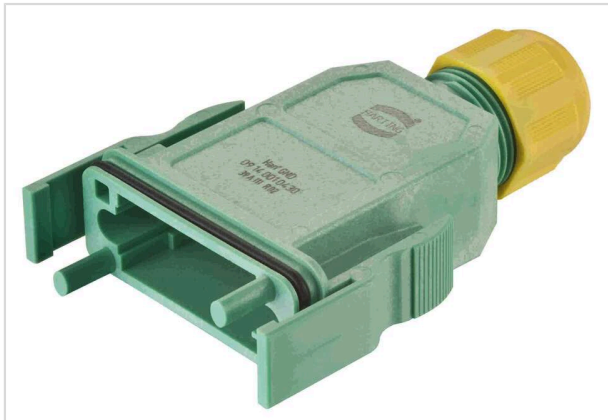


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 001 0430
Specification	Han GND hood, 7,5-14mm
HARTING eCatalogue	<a href="https://b2b.harting.com/09140010430">https://b2b.harting.com/09140010430</a>

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han® GND
Type of hood/housing	Hood

### Version

Version	Top entry
Cable entry	1x Integrated
Locking type	Snap-in latches

### Technical characteristics

Limiting temperature	-40 ... +85 °C
Note on the limiting temperature	For use as a connector according to IEC 61984.
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Cable diameter	7.5 ... 14 mm

### Material properties

Material (hood/housing)	Polycarbonate (PC)
Colour (hood/housing)	Green Yellow
Material (seal)	NBR
Material (cable glands)	Polyamide (PA)
Material flammability class acc. to UL 94	V-0



**Pushing Performance**  
Since 1945

## Material properties

RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Naphthalene

## Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
----------------	--------------------------

## Commercial data

Packaging size	1
Net weight	36.1 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140019072
eCl@ss	27440202 Shell for industrial connectors