


Part number

VS 2258.2

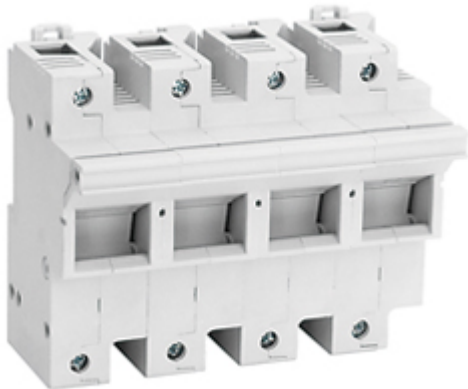

Sectionable fuse carrier, VS series, for cylindrical fuse-links 22 x 58 mm, two-pole, 4 modules

Product description

Product type	Sectionable fuse carrier
Series	VS
Specification	For cylindrical fuse-links 22 x 58 mm Two-pole, 4 modules

Technical data

IP degree of protection	IP20
--------------------------------	------

Further technical details

Weight	462,00 g
UL 94 flammability rating	V-0

Material properties

Colour	RAL 7032 grey
---------------	---------------

General ordering information

EAN13 code	8015747093361
-------------------	---------------

Packaging Information


Sub-packaging length	116,00 mm
Sub-packaging height	103,00 mm
Sub-packaging width	230,00 mm
Sub-packaging weight	1,39 kg
Sub-packaging volume	2,75 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	3 Pcs
Sub-packaging EAN barcode	8015747093378

Part number

VS 2258.2




Catalogue drawings

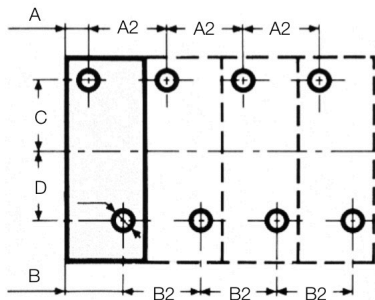

	VS 1451	VS 2258
A	21	26
A2	26,2	35
B	21	26
B2	26,2	35
C	35	35
D	45	60
Ø	4,5	4,5

Catalogue drawings

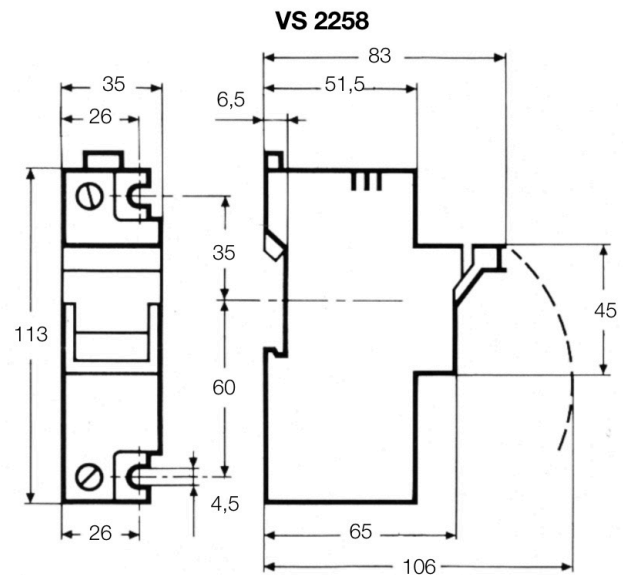

Notes

Dimensions shown in mm are not binding and may be changed without notice.

Suitable for fixing on DIN-rail EN 60715.
 Terminals with unlosable screw.
 Fuse-links not included, types with sectionable neutral provided with fixed neutral cylinder.
 Insulating parts realized in glass-fibre reinforced thermosetting polyester, colour grey RAL 7035.

Recommended maximum capacity:
 - 380V : 25A
 - 500V : 20A

Suitable for fixing on DIN-rail EN 60715.
 Terminals with unlosable screw.
 Fuse-links not included, types with sectionable neutral provided with fixed neutral cylinder.
 Insulating parts realized in glass-fibre reinforced thermosetting polyester, colour grey RAL 7035.

Recommended maximum capacity:
 - 380V : 100A
 - 500V : 80A
 - 660V : 50A