

## D-Sub 15-pole MinD ANG male BL nut M3 PL

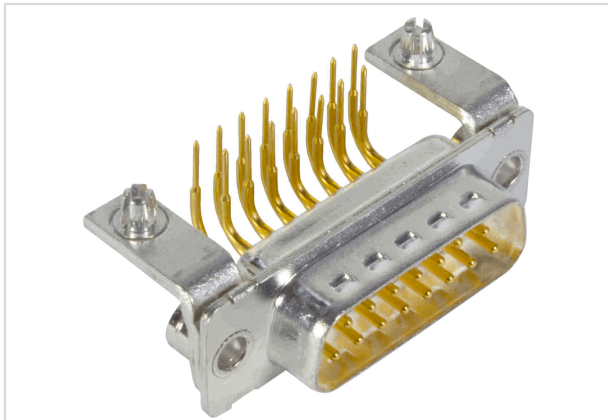


Image is for illustration purposes only. Please refer to product description.

Part number	09 67 262 6801
Specification	D-Sub 15-pole MinD ANG male BL nut M3 PL
HARTING eCatalogue	<a href="https://b2b.harting.com/09672626801">https://b2b.harting.com/09672626801</a>

### Identification

Category	Connectors
Series	D-Sub
Identification	Standard
Element	Connector
Description of the contact	Turned Angled

### Version

Termination method	Wave soldering termination
Gender	Male
Size	D-Sub 2
Connection type	Motherboard to daughtercard
Number of contacts	15
Termination length	3.8 mm
PCB fixing	With board locks
Locking type	Fixing flange with thread M3

### Technical characteristics

Distance between rows	2.54 mm
Contact spacing (termination side)	2.74 mm
Flange height	7.3 mm
Rated current	7.5 A
Clearance distance	≥1 mm



**Pushing Performance**  
Since 1945

## Technical characteristics

Creepage distance	≥1 mm
Insulation resistance	>10 <sup>10</sup> Ω
Contact resistance	≤10 mΩ
Tightening torque	≤0.6 Nm Female screw lock
Limiting temperature	-55 ... +125 °C
Insertion force	≤50 N
Withdrawal force	≥4.5 N ≤33 N
Performance level	2 acc. to CECC 75301-802
Mating cycles	≥250
Test voltage U <sub>r.m.s.</sub>	1 kV
Isolation group	IIIa (175 ≤ CTI < 400)
PCB thickness	≥1.6 mm
Installation height	7.3 mm
Hot plugging	No

## Material properties

Material (insert)	Thermoplastic resin, glass-fibre filled (PBTP) Shell: steel, tin plated
Colour (insert)	White
Material (contacts)	Copper alloy
Surface (contacts)	Noble metal over Ni Mating side Sn over Ni Termination side
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(a) / 6(a)-I: Lead as an alloying element in steel for machining purposes and in galvanised steel containing up to 0,35 % lead by weight / Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight 6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes



**Pushing Performance**  
Since 1945

## Material properties

REACH SVHC substances	Lead
ECHA SCIP number	ecef7555-f643-4ceb-a337-fc54762297f1
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

## Specifications and approvals

Specifications	DIN 41652
UL / CSA	UL 1977 ECBT2.E102079

## Commercial data

Packaging size	50
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140220591
eCl@ss	27440214 D-Sub coupler