

## Han-Yellock 60 carrier hood button slot

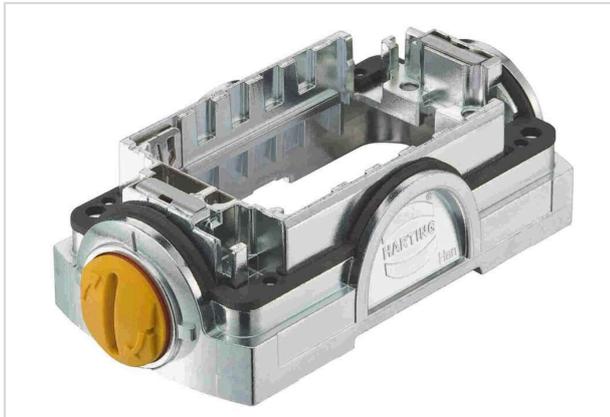


Image is for illustration purposes only. Please refer to product description.

Part number	11 12 600 0110
Specification	Han-Yellock 60 carrier hood button slot
HARTING eCatalogue	<a href="https://b2b.harting.com/11126000110">https://b2b.harting.com/11126000110</a>

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han-Yellock®
Type of hood/housing	Carrier hood
Description of hood/housing	Push button, slot

### Version

Size	Han-Yellock® 60
Locking type	Push button
Field of application	Hoods/housings for industrial applications

### Technical characteristics

Limiting temperature	-40 ... +125 °C
Note on the limiting temperature	For use as a connector according to IEC 61984.
Un-/locking temperature	-10 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67

### Material properties

Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Passivated
Colour (hood/housing)	Metallic
Material (seal)	NBR



**Pushing Performance**  
Since 1945

## Material properties

Material (locking)	Polyamide (PA) Stainless steel
Colour (locking)	Melon yellow
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel Naphthalene

## Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
CE	Yes
Approvals	DNV GL

## Commercial data

Packaging size	1
Net weight	252.7 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140110175
eCl@ss	27440202 Shell for industrial connectors